









H280E

Technical data




 Max Lifting Capacity	 Motor Power	 Travel Speed	 Hydraulic Flow	 Max Lifting Height
1500 kg	30×2 kw	25 km/h	80 l/min	2.6 m



Technical data	H280E
Battery Type	Lithium iron phosphate battery
Battery capacity/kWh	32.2
Drive motor/kW	30
Pump motor/kW	30
Charging voltage/V	110/220(380)
Charging time/h	4(2)
Loading time/h	8-12
Running time (uninterrupted)	7-8
Operating voltage V	12
Battery Ah	45
Operating weight kg	3000
Tipping load ,max kg	1700
Lifting capacity,max kg	1500
Operator's cab	Cab/Canopy
Travel speed km/h	0~20
Steering angle °	45
Turn radius inside/outside mm	1600/3120
Standard tires	10.0/75-15.3
Hydraulic oil tank capacity l	50
Working hydraulic flow l/min	80
Working hydraulic pressure bar	200
Transmission type	Electric direct drive

H280E Dimensions/mm

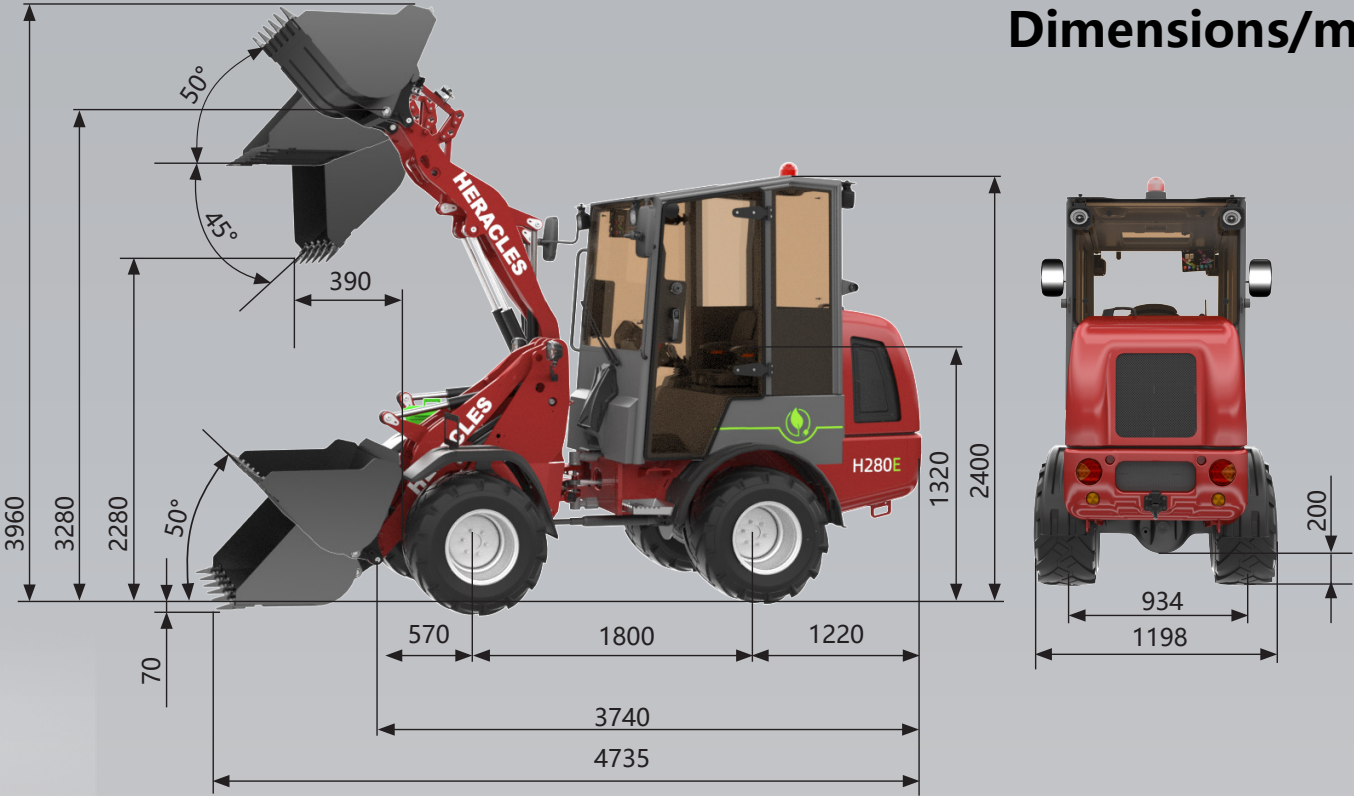

Tires size	Height	Width
10.0/75-15.3	2395	1198
31/15.5-15	2400	1450

<ul style="list-style-type: none"> S 2850 kg T 2100 kg U 1570 kg V 1200 kg W 2950 kg X 1950 kg Y 1500 kg 		
---	--	--

Products will continue to be optimized, so the technical data on this page may not be updated in real time.
 For more information at: www.heracles.eu
 Or contact us (contact information is on the back cover).